


4030MH "big"





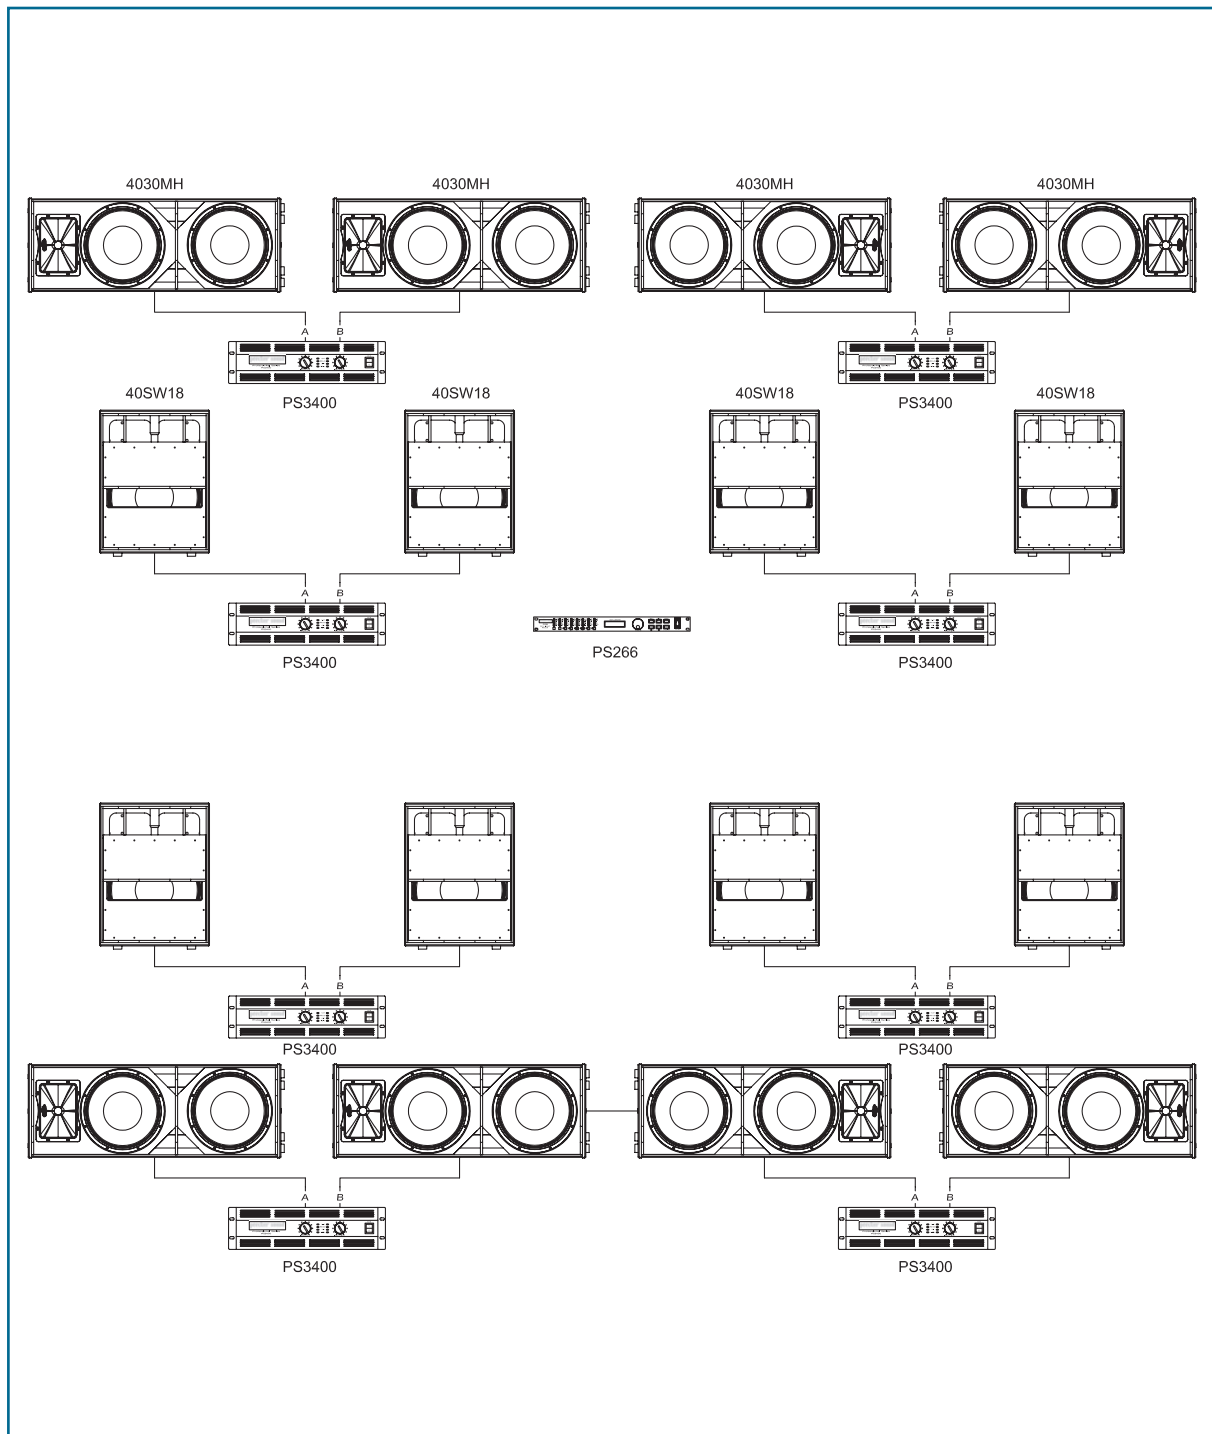

APPLICATIONS

- Disco bars, music pubs, lounge bars;
- Medium-sized installations;
- Fairs, festival, exhibitions, events;
- Multipurpose halls, congress centers;
- Medium to large live club.

DESCRIPTION

- Total power handling: **12800 W**
- Amplifiers' power: **27200 W RMS** (@ 4Ω)
- Covered sound area: **64-72 m²**
- Quality/price ratio: ★★★★★

UNITS

MODEL	QUANTITY	TECHNICAL SPECIFICATIONS
	4030MH 08	2-way speaker system, 900 W RMS, 8 Ω, Peak SPL 136 dB
	40SW18 08	Subwoofer, 700 W RMS, 8 Ω, Peak SPL 134 dB
	PSDSP3400 08	Stereo amplifier, 2 x 1700 W RMS @ 4 Ω
	PS266 01	Digital Speaker Management System, 2 Input 6 Output

ACCESSORIES

STD-4030	Horizontal flying bracket for Forty 4030MH loudspeakers + 10MA adapter flange
PS-OC6	Kit of three 10MA eyelets for vertical hanging of Forty Series speakers
STD-WALL	Wall bracket for the vertical support of a Forty Series loudspeaker

CONNECTORS

FORTY Series loudspeakers are equipped with a pair of Neutrik Speakon NL4 connectors. Only the poles 1+/1- of each connector are wired for full range systems with

passive crossover and for subwoofers. Using the male-connector as input, female connector allows for direct connection to the other loudspeakers.